



VERNE

Proyector versátil de interior para instalación en carril electrificado estándar o de superficie. Luminaria de diseño moderno que permite rotaciones en diferentes sentidos y regulación del haz de luz. Fuente de alimentación integrada. Recomendado para iluminación general y de acento, tiendas y comercios, salas de exposición, restaurantes, hoteles, etc. Disponible en diferentes acabados, temperaturas de color y potencias.

Versatile indoor projector for installation on electrified rail standard or surface mounted. Modern luminaire design that allows rotations in different directions and regulation of the light beam. Integrated power supply. Recommended for general and focused lighting, shops, showrooms, restaurants, hotels, etc. Available in different finishes, color temperatures and wattages.



Dibujo Técnico/ Technical Drawing

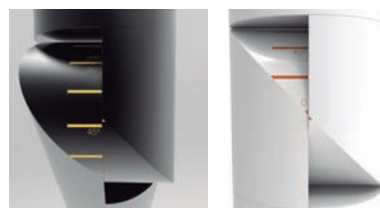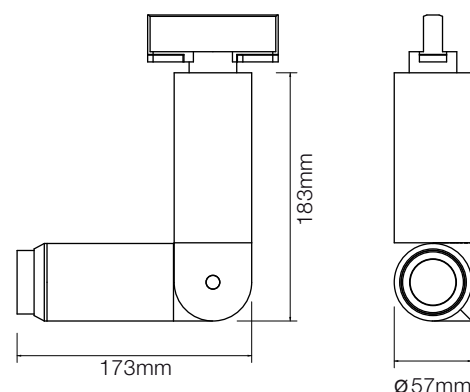

GRADOS DE INCLINACIÓN
DEGREES

Especificaciones Técnicas / Technical specifications

	VERNE WW	VERNE NW	VERNE CW
Potencia Total/ Rated Power	25 W	25 W	25 W
Cantidad LED/ LED Quantity	1 LED	1 LED	1 LED
Voltaje entrada/ Input Voltage	AC 100-277V	AC 100-277V	AC 100-277V
Frecuencia/ Frequency Range	50-60 Hz	50-60 Hz	50-60 Hz
Ángulo de apertura/ Beam angle	10°/25°	10°/25°	10°/25°
IRC/ CRI	90	90	85
T° de color/ Color T°	3000K	4000K	5000K
Eficiencia/ Efficiency	90.4 lm/W	95.2 lm/W	105 lm/W
Flujo luminoso/ Luminous Flux	2260 lm	2380 lm	2620 lm
T° de trabajo/ Working T°	-35°C - 50°C	-35°C - 50°C	-35°C - 50°C
Humedad de trabajo/ Humidity	10% - 90%	10% - 90%	10% - 90%
Corriente driver/ Driver Current	700mA	700mA	700mA



VERSIÓN DE SUPERFICIE
SURFACE VERSION

VIDA ÚTIL
60.000h  **IP20** **CE A+**